

Stereo Tuner

TU-6200



Stereo Tuner

TU-6200



- **MEMORY OF 40 FM/AM FREQUENCIES**

- 40 broadcasting frequencies can be memorized.


- **AUTO SCAN**

- Broadcast station can be selected automatically with automatic seek function.

- **AMX, CRESTRON INTERFACE**

- It supports the control port to integrate with the remote control device such as AMX and CRESTRON control systems for the user assignments.

FRONT/REAR PANEL

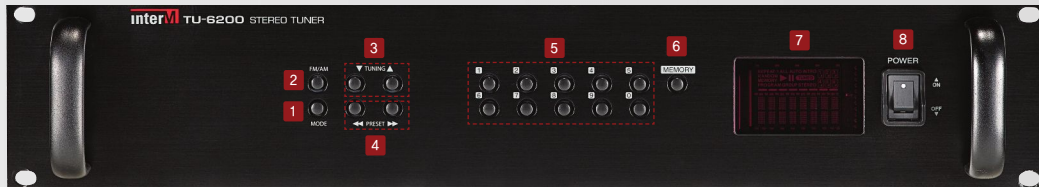


- | | |
|----------------------------------|----------------------|
| 1 MODE BUTTON | 5 0~9 NUMBER BUTTONS |
| 2 AM/FM BUTTON | 6 MEMORY BUTTON |
| 3 ▼/▲ (FREQUENCY DOWN/UP) BUTTON | 7 DISPLAY WINDOW |
| 4 ◀◀/▶▶ (PRESET DOWN/UP) BUTTON | 8 POWER BUTTON |



- | | |
|------------------------|------------------------|
| 1 AC INPUT TERMINAL | 4 L-CHANNEL XLR OUTPUT |
| 2 RS-232 INTERFACE | 5 RCA OUTPUT TERMINAL |
| 3 R-CHANNEL XLR OUTPUT | 6 ANTENNA TERMINAL |


BLOCK DIAGRAM

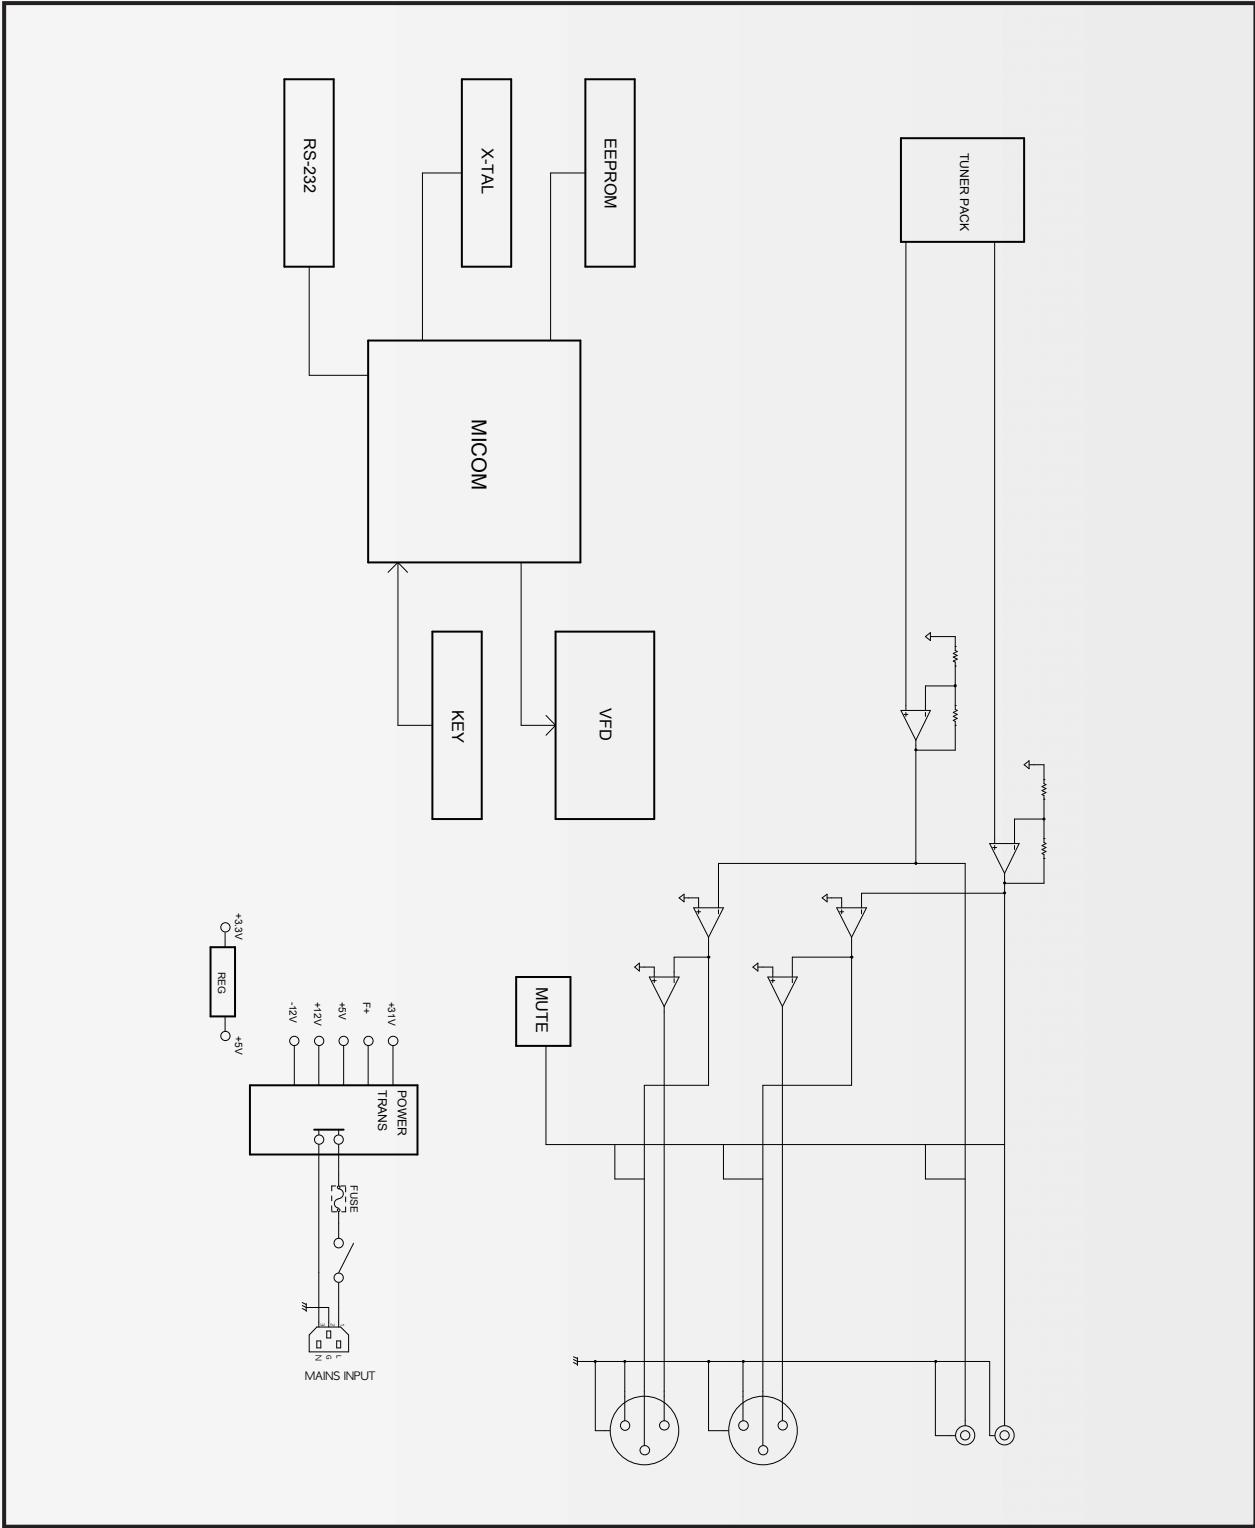

SPECIFICATIONS

	TU-6200
FM (75kHz MOD. 1kHz)	
Tuning range	87.5~108.0MHz
Sensitivity	6dB(Less than 10dB)
T.H.D. (Mono)	0.3% (Less than 1%)
S/N (mono)	60dB (Better than 50dB)
Output level (75kHz MOD.)	0dB±3 dB
AM (30% MOD 400Hz)	
Tuning range	Europe: 522~1629kHz, U.S.A: 520~1710kHz
Sensitivity	82dB(Less than 86dB)
S/N	35dB(Better than 30dB)
T.H.D.	1.5% (Less than 3%)
Output level	-10dB±3 dB
Operation Temperature	-10°C ~ +40°C
Power source	100–120VAC or 220–240VAC; 50/60Hz (Supplied AC mains transformer depends on country requirements)
Power consumption	7W
Weight (SET)	4.2kg/9.3lb
Dimensions (SET)	482(W)×88(H)×280(D)mm/19(W)×3.5(H)×11(D)in

DIMENSIONS

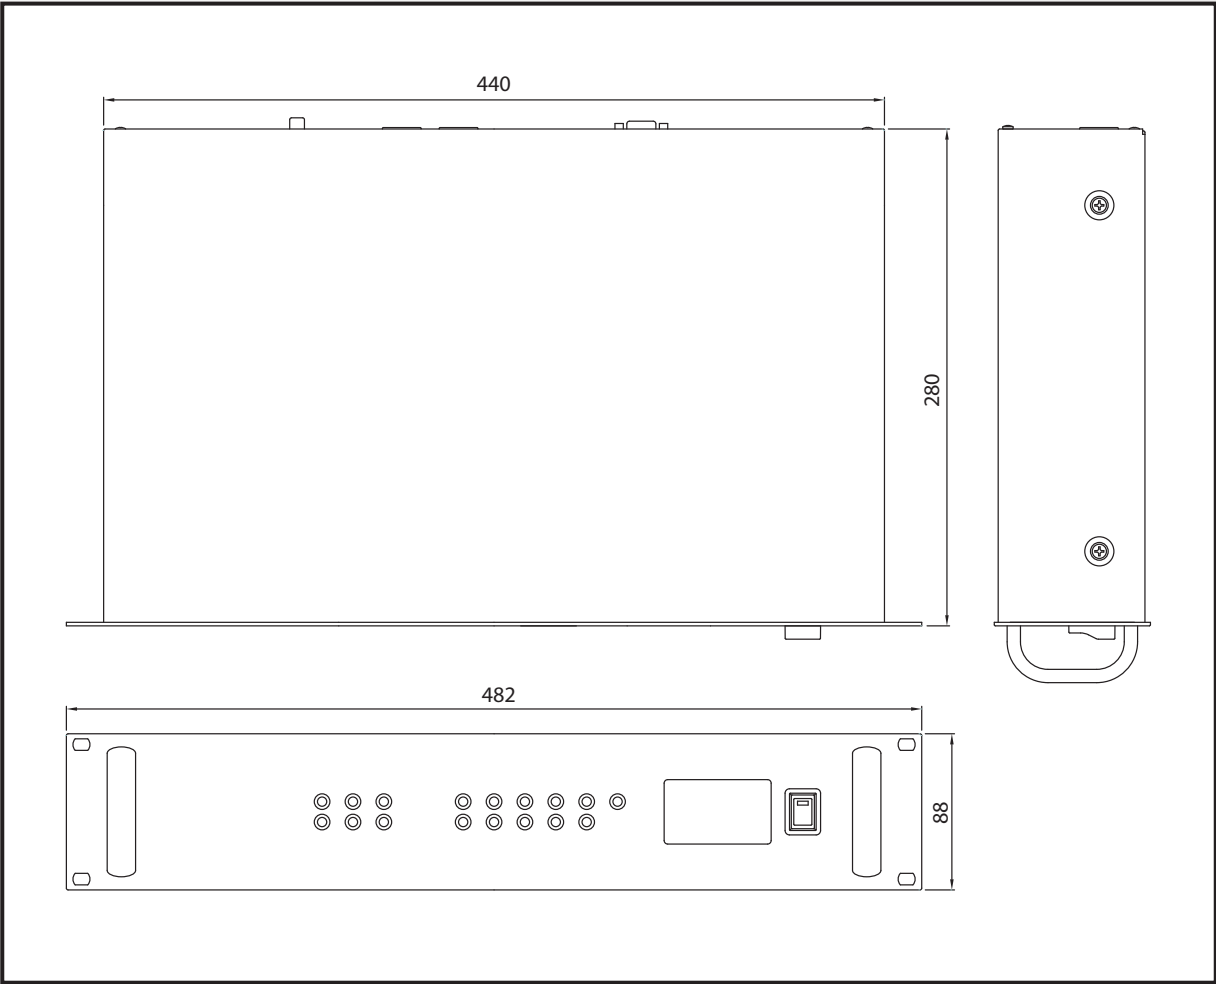

NOTE



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com